SILVER DYNAMIC AGM

Key benefits

- Extended cycle life compared with a conventional battery
- Designed for vehicles with advanced Start-Stop functionality with regenerative braking
- VARTA AGM (Absorbent Glass Mat) technology with outstanding performance for powerful engines and highly equipped cars
- Clean manufacturing – with 20% less energy and 20% fewer greenhouse gas emissions. Closed recycling loop with ecosteps® – preserving resources while protecting the environment
- PowerFrame® grid technology for high starting power and reliable performance
- Due to its design, this battery won't leak, even if it is broken

For more information visit www.varta-automotive.com

ORDER INFORMATION	
European Type No. (ETN):	560 901 068
Article Number:	560 901 068 D85 2
Short Code:	D52
Barcode:	4016987144497
UK Code:	027AGM
Packaging Unit:	1
Quantity per Pallet:	57

TECHNICAL INFORMATION			
Voltage [V]:	12	**Base Hold-down:**	B13
Battery Capacity [Ah]:	60	**Layout:**	0
Cold Cranking Amps (CCA), EN [A]:	680	**Terminal Types:**	1
Length [mm]:	242	**Case Size:**	H5/LN2
Width [mm]:	175	**Weight filled (kg):**	17,5
Height [mm]:	190		

DRAWINGS

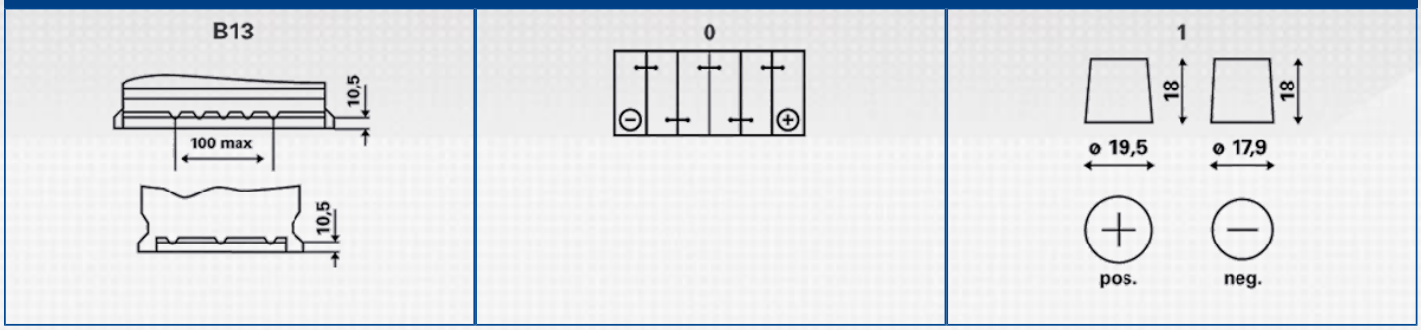

THE CONSTRUCTION OF VARTA SILVER DYNAMIC BATTERIES WITH AGM TECHNOLOGY

- Constructed with advanced Absorbent Glass Mat (AGM) technology
- AGM technology prevents corrosion due to acid stratification
- Highest performance, extreme cycle life and spill-proof
- Electrolyte held in the glass fleece separator exerts a uniformly high contact pressure

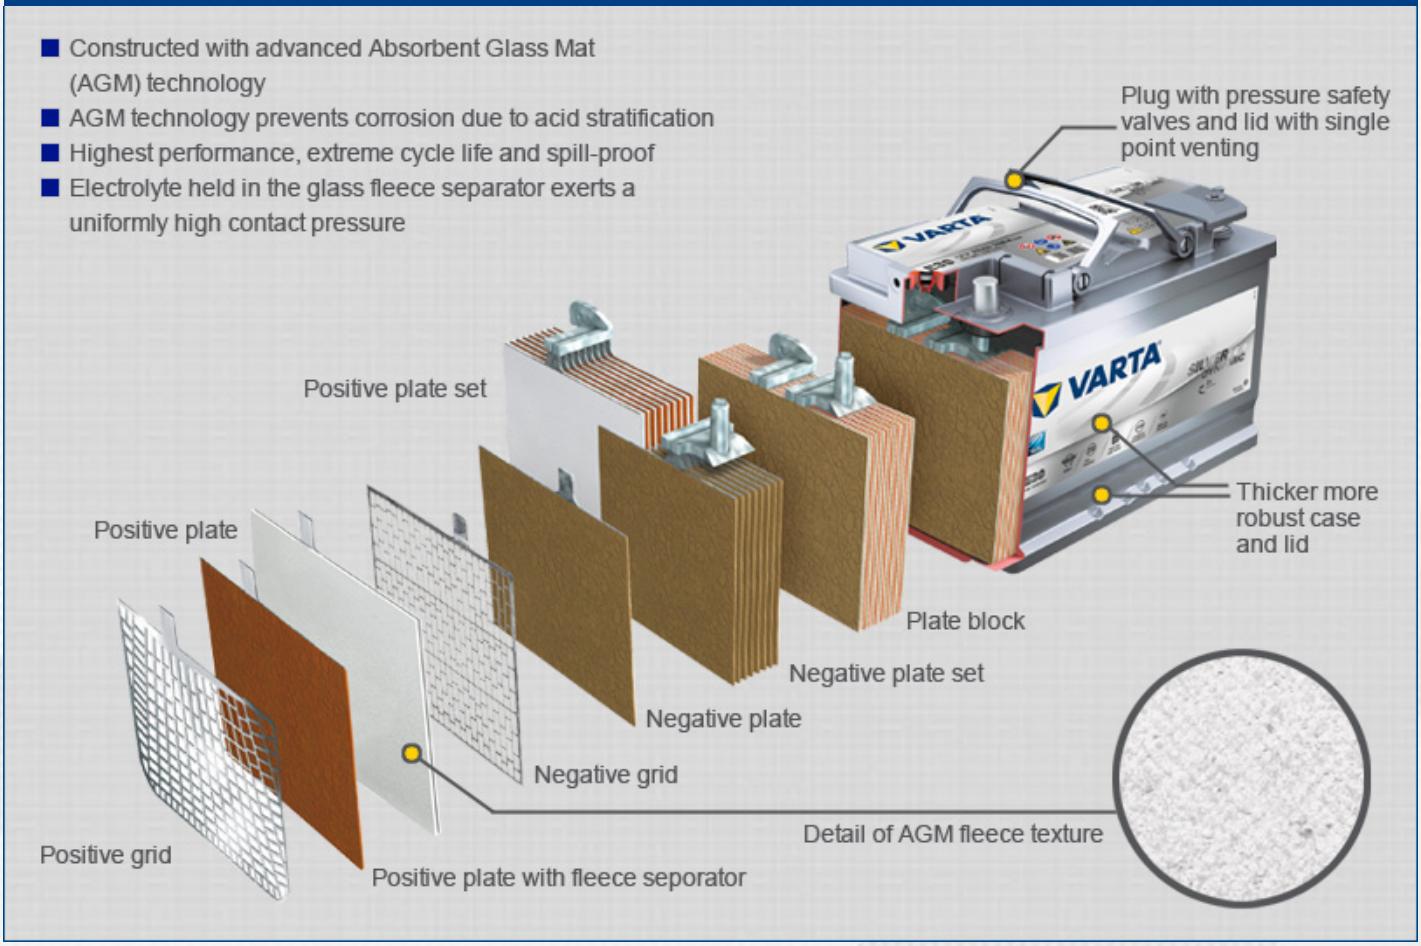

Features	*SILVER dynamic AGM*	*BLUE dynamic EFB*
Number of battery types	5 Types	5 Types
Primary function	Advanced Start-Stop functionality	Ensures Start-Stop functionality
Cold cranking power	CCA 135 %	CCA 115 %
Battery technology	AGM – Absorbent Glass Mat	EFB – Enhanced Flooded battery
Positive grid / Negative grid	PowerFrame® / Casted grid	PowerFrame® / Expanded grid
OE quality	Meets OE requirements	Meets OE requirements
Cycling endurance	3x higher*	2x higher*
Capability of deep discharge	High*	Middle*

*Compared to conventional batteries